

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

<p>(51) International Patent Classification 6 : G06K 7/12, 19/06, 19/14, C08J 5/18, G02B 5/30</p>	<p>A1</p>	<p>(11) International Publication Number: WO 98/01817</p> <p>(43) International Publication Date: 15 January 1998 (15.01.98)</p>
<p>(21) International Application Number: PCT/GB97/01763</p> <p>(22) International Filing Date: 1 July 1997 (01.07.97)</p> <p>(30) Priority Data: 9614261.7 6 July 1996 (06.07.96) GB</p> <p>(71) Applicant (for all designated States except US): THE SECRETARY OF STATE FOR DEFENCE IN HER BRITANNIC MAJESTY'S GOVERNMENT OF THE UNITED KINGDOM OF GREAT BRITAIN AND NORTHERN IRELAND [GB/GB]; Defence Evaluation & Research Agency, Ively Road, Farnborough, Hampshire GU14 0LX (GB).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): SAGE, Ian, Charles [GB/GB]; Defence Research Agency, St. Andrews Road, Malvern, Worcs. WR14 3PS (GB).</p> <p>(74) Agent: SKELTON, Stephen, Richard; D/IPR (DERA) Formalities, Poplar 2a, MOD (PE) Abbey Wood #19, P.O. Box 702, Bristol BS12 7DU (GB).</p>		<p>(81) Designated States: GB, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: A COVERT MARK AND SECURITY MARKING SYSTEM</p> <p>(57) Abstract</p> <p>A covert mark (1) which may be applied to an article (2) comprises a fluorescent or phosphorescent material and has a unidirectionally aligned structure. Upon illumination of the mark (1) with ultraviolet radiation (3a), the mark (1) emits polarised fluorescent or phosphorescent radiation (3b) of characteristic radiation. The mark (1) may therefore be used in a system for covertly marking and checking the authenticity of a genuine article (2) whereby polarised fluorescent or phosphorescent radiation (3b) emitted from the mark (1) is incident on linearly polarising material. Detecting polarised fluorescent or phosphorescent radiation (3b) of characteristic wavelength and polarisation provides an indication of the authenticity of the article (2). By varying the orientation of the linearly polarising material, the plane of polarisation of radiation transmitted by the material is varied and a characteristic flashing effect is observed. The observation of fluorescent or phosphorescent radiation (3b) of characteristic wavelength in addition to the characteristic flashing effect provides an indication of the authenticity of the article (2). In an alternative arrangement, the system may comprise a liquid crystal cell, containing a twisted nematic material, to which a variable voltage is applied. The voltage applied across the liquid crystal cell may be varied to produce the required characteristic flashing effect.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A COVERT MARK AND SECURITY MARKING SYSTEM

This invention relates to a covert security mark which may be used in a security system for identifying genuine and counterfeit articles. The mark is covert and the system may therefore be operated covertly. It has particular (although not exclusive) relevance to the retail trade.

Counterfeiting of articles is a long standing international problem in, for example, the retail trade and credit card industry and the need for an effective means of combating counterfeiting has attracted considerable attention. One technique for indicating the authenticity of a particular article is by the use of a trademark. Such trademarks are becoming increasingly complex in design incorporating, for example, optical effects such as holograms and diffraction patterns. However, large scale counterfeiting organisations have access to considerable resources and are becoming increasingly successful at copying even the most complex marks.

Other more sophisticated anticounterfeiting measures involve the use of phosphorescent or fluorescent materials which are invisible under normal lighting but are activated when illuminated by ultra violet radiation. Properties of the fluorescent or phosphorescent radiation, for example the intensity, wavelength or the fluorescence or phosphorescence lifetime, may then be used to provide the authenticating signature. While such measures are well known as a covert means of security marking, it is possible to replicate a printed fluorophor or phosphor mark, especially considering the increasing expertise and resources of large scale anticounterfeiting organisations.

The present invention relates to a covert security mark comprising a fluorescent or phosphorescent material and a security marking system in which the mark may be used. As well as having characteristic fluorescent or phosphorescent properties, the mark also has an additional polarisation property which acts as further means of authentication and makes the mark more difficult to replicate. The mark is intrinsically cheap to manufacture and easy to detect and verify.

According to the present invention, a mark for covertly marking an article comprises:

a fluorescent or phosphorescent material having an absorption band,

wherein the mark has a unidirectionally aligned structure such that upon illumination with radiation corresponding to the absorption band in the material the mark emits polarised fluorescent or phosphorescent radiation of characteristic wavelength.

According to another aspect of the invention, a system for covertly marking an article and checking its authenticity comprises:

a mark applied to the article, wherein the mark comprises a fluorescent or phosphorescent material having an absorption band and has a unidirectionally aligned structure,

a source of electromagnetic radiation for illuminating the article, wherein the wavelength of said radiation corresponds to the absorption band in the material, such that upon illumination the mark emits polarised fluorescent or phosphorescent radiation of characteristic wavelength and

means for detecting the polarised fluorescent or phosphorescent radiation emitted from the mark,

whereby the detection of the polarised fluorescent or phosphorescent radiation of characteristic wavelength provides an indication of the authenticity of the article.

The source of electromagnetic radiation may be an ultra violet lamp emitting radiation between 200 nm and 400 nm. Alternatively, the source of electromagnetic radiation may be a lamp emitting short wavelength visible light between 380 nm and 550 nm.

The means for detecting the polarised fluorescent or phosphorescent radiation may include a sample of linearly polarising material having a polarisation axis substantially perpendicular to the direction of fluorescent or phosphorescent radiation.

The polarisation of fluorescent or phosphorescent radiation may be varied such that the detection of the variation in polarisation provides an indication of the authenticity of the mark.

The orientation of the sample of linearly polarising material may be varied such that the polarised fluorescent or phosphorescent radiation is detected at two or more orientations of the sample.

The system may also include;

a liquid crystal cell for transmitting the polarised fluorescent or phosphorescent radiation, wherein said liquid crystal cell is capable of rotating the plane of polarisation of the fluorescent or phosphorescent radiation transmitted through the cell and

means for applying a variable voltage across the liquid crystal cell

such that on application of the variable voltage across the cell the polarisation of fluorescent or phosphorescent radiation passing through the cell is varied.

The liquid crystal cell may comprise a twisted nematic material.

The system may also comprise;

a first retardation plate for converting the linearly polarised fluorescent or phosphorescent radiation into circularly or elliptically polarised radiation,

a second retardation plate for converting said circularly or elliptically polarised radiation into linearly polarised radiation wherein the second retardation plate is mounted in front of the means for determining the state of polarisation,

such that elliptically or circularly polarised fluorescent or phosphorescent radiation is transmitted between the first and second retardation plates.

The polarisation of fluorescent or phosphorescent radiation may be related to the intensity of radiation transmitted by the linearly polarising material. The radiation may be observed directly by the human eye or may be detected by a suitable detector. A narrow band filter may be mounted in front of the eye or the detector in order to enhance the observation or detection of the fluorescent or phosphorescent radiation of characteristic wavelength.

The mark may comprise two or more sections wherein different sections of the mark are unidirectionally aligned along different directions. Different sections of the mark may also comprise different fluorescent or phosphorescent materials.

According to another aspect of the invention, a method for producing a mark for covertly marking an article comprises the steps of:

- (i) dispersing a sample of polymer in solvent at room temperature to form a viscous solution,
- (ii) dispersing a fluorescent or phosphorescent material in said viscous solution to form a fluorescent or phosphorescent solution,
- (iii) spreading a substantially uniform layer of fluorescent or phosphorescent solution on a substrate and drying the solution,
- (iv) removing the dried layer from the substrate and heating the layer to a temperature above the glass transition point of the polymer,
- (v) unidirectionally stretching the heated layer so as to produce a film having a unidirectionally aligned structure,
- (vi) cooling the film to substantially room temperature and
- (vii) producing marks to be applied to the genuine article from the film.

The film may be laminated to a retardation plate prior to producing marks to be applied to the genuine article. The marks may be produced from the film using a foil stamping process.

The polymer may be poly vinyl alcohol (PVA), cellulose acetate, polyethylene terephthalate (PET), polycarbonate or poly vinyl chloride (PVC). In the case of poly vinyl alcohol, the dried layer is heated to substantially 100°C.

According to another aspect of the invention, a method for covertly marking an article and checking its authenticity comprises the steps of;

- (i) applying a mark to the article, wherein said mark comprises a fluorescent or phosphorescent material having an absorption band and has a unidirectionally aligned structure,
 - (ii) illuminating the article with a source of electromagnetic radiation, wherein the wavelength of said radiation corresponds to the absorption band in the fluorescent or phosphorescent material, such that upon illumination polarised fluorescent or phosphorescent radiation of characteristic wavelength is emitted from the mark,
 - (iii) detecting the polarised fluorescent or phosphorescent radiation of characteristic wavelength,
- whereby the detection of polarised fluorescent or phosphorescent radiation of characteristic wavelength provides an indication of the authenticity of the article.

The invention will now be described, by example only, with reference to the following figures in which;

Figure 1 shows a diagram of a security system which may be used for product identification or verification purposes and employs linearly polarised radiation

Figure 2 shows a diagram of an alternative arrangement of the system for which circularly or elliptically polarised radiation is employed,

Figure 3 shows an alternative configuration of the system, incorporating a liquid crystal cell and

Figure 4 shows a diagram of the security system, for operation in transmission mode.

Referring to Figure 1, a security mark 1 is applied to an article 2 which is to be authenticated. The mark comprises a fluorescent or phosphorescent material and is such that under normal lighting conditions it appears invisible to an observer. The mark 1 is illuminated with radiation 3a (wavelength = λ_a) from a radiation source 4. The radiation source 4 may be a source of ultra violet radiation emitting radiation in the wavelength region between approximately 200 nm and 400 nm and preferably between 250 nm and 380 nm. Alternatively, the source may be a lamp emitting short wavelength visible radiation in the region between 380 nm and 550 nm. For a mark comprising a fluorescent or phosphorescent material, upon illumination with the radiation 3a, fluorescent or phosphorescent radiation 3b of characteristic wavelength (λ_b) is emitted from the mark 1. The radiation may be observed directly by a human eye 5, as shown in the diagram, or may be detected by a suitable detector.

A narrow band filter (not shown) may be mounted in front of the detector or the eye in order to enhance the detection or observation of radiation of characteristic wavelength.

The aligned structure of the mark is such that characteristic fluorescent or phosphorescent radiation emitted from the mark is linearly polarised and the polarisation properties of the radiation are then used to provide a means for verifying the authenticity of the mark. The observation of the fluorescent or phosphorescent radiation without the required polarisation effects is not sufficient to authenticate the article.

The system may be operated with either linearly polarised radiation eliptically polarised radiation or circularly polarised radiation, the latter of which lends itself to more covert operation. Referring to Figure 1, in the case of linearly polarised radiation, an element of linearly polarising material 6 (for example, a sheet of polariser) is placed in the path of reflected radiation 6b prior to detection. The aligned structure of the mark 1 is such that there is a strong dependence of the apparent fluorescence brightness on the orientation of the polariser.

The polarisation transmission axis of the polariser may remain fixed so that only incident radiation of a particular polarisation is transmitted by the polariser. The intensity of radiation observed may then be compared with that expected for the arrangement as a means of checking the authenticity of the mark. In this case, suitable detection means, such as a photodetector sensitive to the radiation emitted by the fluorescent or phosphorescent material, would be required to measure the intensity of radiation transmitted by the polariser.

In a preferred arrangement, the polarisation transmission axis of the polariser may be switched so that fluorescent or phosphorescent radiation of a particular polarisation is alternately transmitted and blocked by the polariser, therefore giving rise to a characteristic flashing effect. For example, rotating a polariser 6 about an axis substantially parallel to the direction of emitted radiation gives a flashing appearance to the mark 1 which may easily be recognised by the human eye. To give the desired flashing effect the polariser may be continuously rotated about this axis or may alternate between substantially orthogonal orientations. The observation of both the flashing effect in combination with the characteristic fluorescent or phosphorescent radiation provides a verification of the authenticity of the article. The characteristic effect may be an intensity variation or may be apparent as a colour variation.

Referring to Figure 2, the mark 1 may be laminated to a retardation plate 7, for example a quarter-wave plate, and this combination is then applied to the article 2 to be authenticated. If the retardation plate is a quarter-wave plate, on passing through the plate 7 plane polarised radiation transmitted from the mark becomes circularly polarised. A second retardation plate 8 is mounted in front of the human eye, or the detection means, to convert the circularly polarised radiation back to plane polarised radiation, prior to observation or detection.

Left-handed and right-handed circularly polarised radiation passing through the quarter-wave plate 8 is converted into linearly polarised radiation where the plane of polarisation of radiation output from the quarter-wave plate depends on the handedness of the radiation 3b input to the quarter-wave plate 8. By rotating the polarisation axis of the polariser 6, the amount of linearly polarised radiation transmitted by the polariser varies and gives rise to a characteristic flashing effect as described previously. Alternatively, the orientation of the retardation plate may be varied to give the same effect.

Elliptically polarised radiation may also be transmitted between the first retardation plate 7 and the second retardation plate 8 by use of suitable retardation plates.

Referring to Figure 3, a twisted nematic liquid crystal cell 9 and a fixed sheet of linearly polarising material 10 may be used instead of a rotating polariser in order to produce the desired flashing effect. Figure 3 shows the case where plane polarised radiation is employed but the cell 9 may also be used, in conjunction with the polariser 10, for elliptically and circularly polarised radiation.

Typically, the cell 9 comprises a conventional twisted nematic liquid crystal material contained within facing glass substrates. The inner surfaces of the glass substrates are typically coated with a transparent conducting layer (not shown), for example indium tin oxide.

Prior to assembly, the glass substrates are rubbed in a particular direction and the liquid crystal aligned along the rubbing direction near the surface of the glass. The upper substrate is aligned such that its rubbing direction is perpendicular to the rubbing direction of the lower glass substrate. Therefore, with no volts applied to the liquid crystal cell there is a continuous twist in the liquid crystal director, between the top and bottom substrates. For a twist of 90 degrees, as incident radiation passes through the liquid crystal cell its plane of polarisation is therefore rotated by 90 degrees by the twisted structure of the director.

A suitable material for use in the liquid crystal cell would be E7 nematic material plus a suitable dopant to define the pitch direction and length (e.g. 1% C15 or 0.05% CB15), available from the E. Merck catalogue. A typical thickness of the liquid crystal material 2 would be between 6-15 μm .

The application of a switchable voltage across the cell electrodes causes the central portion of the liquid crystal to align with the field. The twisted structure no longer exists and the plane of polarisation of incoming light is not rotated as it passes through the cell. On removing the voltage, the liquid crystal material relaxes back to its twisted state. The cell is therefore switched between an OFF (twisted) and ON (not twisted) state by the application and removal of a suitable voltage.

The voltage applied across the face of the cell may be varied by means of a variable voltage source 9. By switching the voltage source 11 between "ON" and "OFF" states, only polarisation of a particular orientation will be transmitted by the polariser 10 and a flashing effect will be seen.

The mark 1 to be applied to the product 2 may be made according to the following technique. A 10 gram sample of poly vinyl alcohol, molecular weight 115,000 (commercially available from E. Merck Ltd.), is dispersed into 100 grams of water at room temperature and stirred over, typically, a 12 hour period to provide a clear, viscous solution. Typically 0.5 grams of Fluorescent Brightener 28 (commercially available from Aldrich Chemical Company, Gillingham, UK) are then added to the poly vinyl alcohol (PVA) solution. The solution is stirred again to dissolve the solid, and then allowed to stand to allow air bubbles to escape.

Many other polymers could be dispersed in solvent to form the solution to which the fluorescent or phosphorescent material is added. For example, the polymer may be cellulose acetate, polyethylene terephthalate (PET), polycarbonate or poly vinyl chloride (PVC).

A portion of the solution may then be spread into a uniform layer approximately 1 mm thick on a plain glass sheet and allowed to air dry. Alternatively the solution may be spread onto a paper layer having a release coating. The resulting dyed PVA layer is then peeled from the glass and a clamp attached at each end. The layer is heated in a hot air stream to a temperature above the glass transition temperature of the polymer. This is typically greater than 40 °C and for PVA is approximately 100 °C. The layer is then unidirectionally stretched and, in the case of PVA, an extension ratio of typically 7:1 may be achieved.

Tension is maintained as the sample is cooled back to room temperature. Patterns may then be stamped from the resulting film, using a conventional foil stamping technique, and backed with a toluene-based adhesive. If circularly or elliptically polarised radiation is to be employed in the system, the film may be laminated to a retardation plate, such as a quarter-wave plate, prior to foil stamping.

Examination of the sample described above under an ultraviolet inspection lamp emitting at 365 nm causes the mark to exhibit a strong blue visible fluorescence which can not easily be distinguished from a standard printed fluorescent or phosphorescent ink mark. However, upon examination under the same lamp with a polarising filter between the eye and the pattern under test, a strong dependence of the apparent fluorescence brightness on the orientation of the polariser is observed, as described previously.

The mark may be made such that it comprises two or more sections wherein different sections are aligned along different directions, such that radiation emitted from each section is polarised in a different direction. For example, a particular section of a trademark may have a different polarisation axis to the rest of the mark, providing an additional level of security. Furthermore, different fluorescent or phosphorescent materials may be used on different sections of a mark or the mark may be used in conjunction with other fluorescent or phosphorescent marks, such as existing marks without polarisation properties.

The mark may be embossed onto a variety of substrates including paper, labels, card, leather, plastic and sheet metal. The security mark may be applied as an anticounterfeiting measure or as a product tracking measure.

Referring to Figure 4, if the product 2 to be authenticated 1 is substantially transparent to the wavelength of incoming radiation 3a (for example, a glass bottle or container) the system may be operated in transmission mode with the observer (or detector) 5 viewing radiation transmitted by the mark 1 and the product 2.

Claims

1. A mark for covertly marking an article comprising;

a fluorescent or phosphorescent material having an absorption band,

wherein the mark has a unidirectionally aligned structure such that upon illumination with radiation corresponding to the absorption band in the material the mark emits polarised fluorescent or phosphorescent radiation of characteristic wavelength.

2. A system for covertly marking an article and checking its authenticity comprising;

the mark of claim 1, wherein said mark is applied to the article,

a source of electromagnetic radiation for illuminating the article, wherein the wavelength of said radiation corresponds to the absorption band in the material, such that upon illumination the mark emits polarised fluorescent or phosphorescent radiation of characteristic wavelength and

means for detecting the polarised fluorescent or phosphorescent radiation emitted from the mark,

whereby the detection of the polarised fluorescent or phosphorescent radiation of characteristic wavelength provides an indication of the authenticity of the article.

3. The system of claim 2 wherein the source of electromagnetic radiation is an ultra violet lamp emitting radiation between 200 nm and 400 nm.

4. The system of claim 2 wherein the source of electromagnetic radiation is a lamp emitting short wavelength visible light between 380 nm and 550 nm.

5. The system of any of claims 2-4 wherein the means for detecting the polarised fluorescent or phosphorescent radiation includes a sample of linearly polarising material having a polarisation axis substantially perpendicular to the direction of fluorescent or phosphorescent radiation.
6. The system of claim 5 wherein the polarisation of fluorescent or phosphorescent radiation is varied and the detection of the variation in polarisation provides an indication of the authenticity of the mark.
7. The system of claim 6 wherein the orientation of the sample of linearly polarising material is varied such that the polarised fluorescent or phosphorescent radiation is detected at two or more orientations of the sample.
8. The system of claim 6, and also including;
- a liquid crystal cell for transmitting the polarised fluorescent or phosphorescent radiation, wherein the liquid crystal cell is capable of rotating the plane of polarisation of the fluorescent or phosphorescent radiation transmitted through the cell and
- means for applying a variable voltage across the liquid crystal cell
- such that on application of the variable voltage across the cell the polarisation of fluorescent or phosphorescent radiation passing through the cell is varied.
9. The system of claim 8 wherein the liquid crystal cell comprises a twisted nematic material.

10. The system of any of claims 2-9, and also comprising;
- a first retardation plate for converting linearly polarised fluorescent or phosphorescent radiation into circularly or elliptically polarised radiation,
- a second retardation plate for converting said circularly or elliptically polarised radiation into linearly polarised radiation wherein the second retardation plate is mounted in front of the means for detecting the fluorescent or phosphorescent radiation,
- such that elliptically or circularly polarised fluorescent or phosphorescent radiation is transmitted between the first and second retardation plates.
11. The system of claim 12 wherein the mark is laminated onto the first retardation plate.
12. The system of any of claims 2-11 wherein the polarisation of fluorescent or phosphorescent radiation is related to the intensity of radiation transmitted by the linearly polarising material.
13. The system of claim 12 wherein the polarised fluorescent or phosphorescent radiation is observable by the human eye.
14. The system of claim 12, and also including a detector for detecting the polarised fluorescent or phosphorescent radiation.
15. The system of any of claims 2-14 wherein the mark comprises two or more sections wherein different sections of the mark are unidirectionally aligned along different directions.
16. The system of any of claims 2-15 wherein the mark comprises two or more sections wherein different sections of the mark comprise different fluorescent or phosphorescent materials.

17. The system of any of claims 2-16, and also comprising a narrow band filter for enhancing the observation or detection of fluorescent or phosphorescent radiation of characteristic wavelength emitted from the mark.

18. A method for producing a mark for covertly marking an article comprising the steps of;

(i) dispersing a sample of polymer in solvent at room temperature to form a viscous solution,

(ii) dispersing a fluorescent or phosphorescent material in said viscous solution to form a fluorescent or phosphorescent solution,

(iii) spreading a substantially uniform layer of fluorescent or phosphorescent solution on a substrate and drying the solution,

(iv) removing the dried layer from the substrate and heating the layer to a temperature above the glass transition point of the polymer,

(v) unidirectionally stretching the heated layer so as to produce a film having a unidirectionally aligned structure,

(vi) cooling the film to substantially room temperature and

(vii) producing marks to be applied to the genuine article from the film.

19. The method of claim 18, and also comprising the step of laminating the film to a retardation plate prior to producing marks to be applied to the genuine article.

20. The method of claims 18 or 19 wherein the marks are produced from the film using a foil stamping process.

21. The method of claim 20 wherein the polymer is poly vinyl alcohol.

22. A method for covertly marking an article and checking its authenticity comprising the steps of;

- (i) applying a mark to the article, wherein said mark comprises a fluorescent or phosphorescent material having an absorption band and has a unidirectionally aligned structure,
- (ii) illuminating the article with a source of electromagnetic radiation, wherein the wavelength of said radiation corresponds to the absorption band in the fluorescent or phosphorescent material, such that upon illumination polarised fluorescent or phosphorescent radiation of characteristic wavelength is emitted from the mark,
- (iii) detecting the polarised fluorescent or phosphorescent radiation of characteristic wavelength,

whereby the detection of polarised fluorescent or phosphorescent radiation of characteristic wavelength provides an indication of the authenticity of the article.

Fig.1.




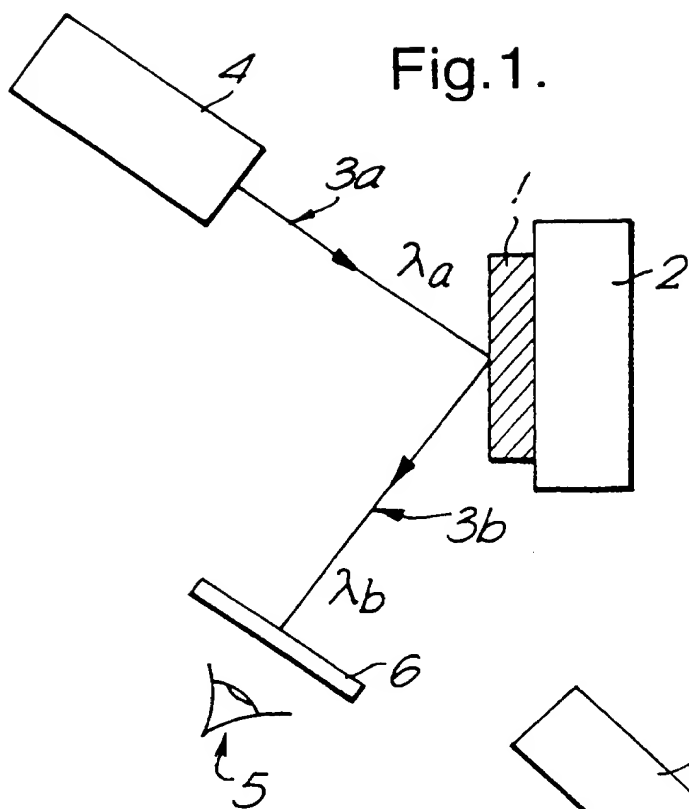


Fig.2.

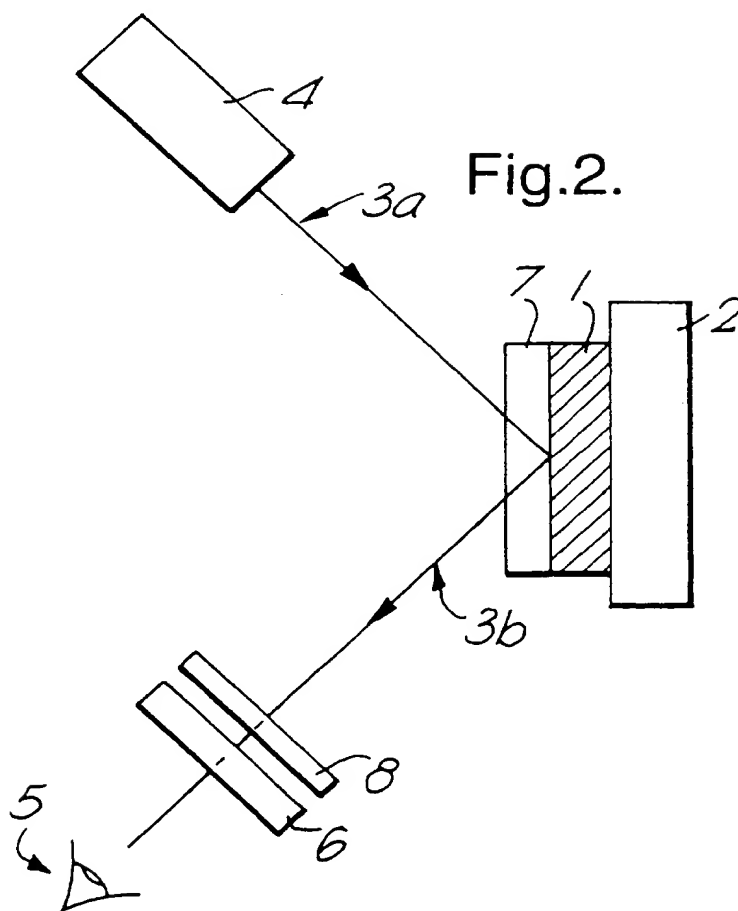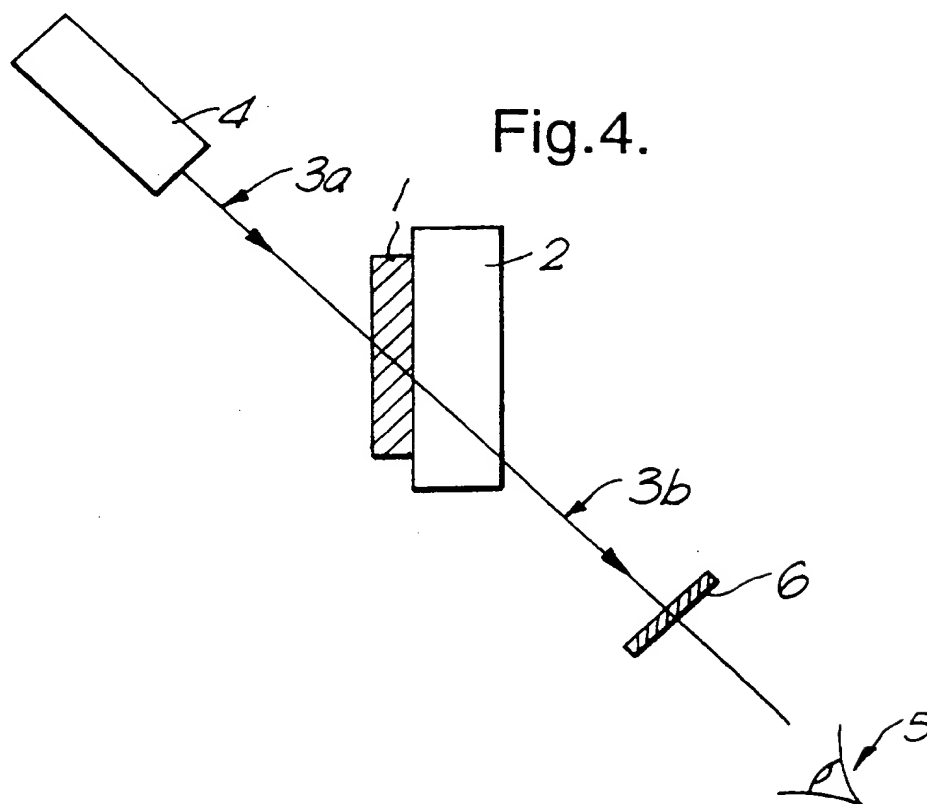

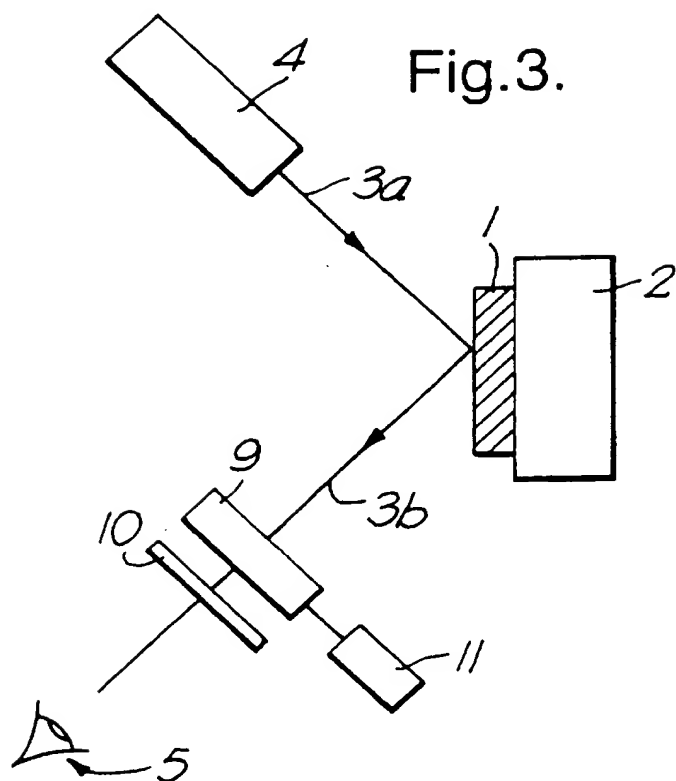

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/GB 97/01763

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G06K7/12 G06K19/06 G06K19/14 C08J5/18 G02B5/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G06K C08J G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 532 104 A (A. GOTO) 2 July 1996 see column 6, line 44 - line 66 see column 10, line 16 - column 11, line 27; figures 1,4	1,2,5, 12-14,22
Y	---	3,4,15, 16
Y	GB 2 189 800 A (MICHAEL ANTHONY WEST) 4 November 1987 see page 1, line 85 - line 97 see page 2, line 77 - line 103; figures 1,5	3,4,15, 16
A	---	1,2,22
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

26 September 1997

Date of making of the international search report

09.10.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Ducrau, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/01763

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 276 316 A (A. S. MAKAS ET AL.) 4 October 1966 see column 1, line 22 - line 26 see column 1, line 54 - line 61 see column 2, line 63 - line 64 ---	18
X	EP 0 297 927 A (UNITIKA LTD) 4 January 1989 see column 2, line 12 - line 38 ---	18
A	PATENT ABSTRACTS OF JAPAN vol. 5, no. 69 (P-060), 9 May 1981 & JP 56 019009 A (SANRITSU DENKI KK), 23 February 1981, see abstract ---	18
A	US 5 502 304 A (WILLIAM BERSON ET AL.) 26 March 1996 see column 2, line 24 - line 40 see column 6, line 66 - column 7, line 9; figures 2,3 ---	1-4,22
A	US 5 423 432 A (J. J. KRUTAK ET AL.) 13 June 1995 see column 1, line 12 - line 20 see column 13, line 32 - line 63; figure 2 ---	18
A	PATENT ABSTRACTS OF JAPAN vol. 10, no. 124 (P-454), 9 May 1986 & JP 60 250304 A (NITTO DENKI KOGYO KK), 11 December 1985, see abstract ---	18
A	PATENT ABSTRACTS OF JAPAN vol. 9, no. 54 (P-340), 8 March 1985 & JP 59 192938 A (SEIKO DENSHI KOGYO KK), 1 November 1984, see abstract -----	6,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 97/01763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5532104 A	02-07-96	JP 7057065 A JP 7121644 A US 5629512 A	03-03-95 12-05-95 13-05-97
GB 2189800 A	04-11-87	DE 3788503 D DE 3788503 T EP 0267215 A WO 8706197 A US 5005873 A	27-01-94 14-04-94 18-05-88 22-10-87 09-04-91
US 3276316 A	04-10-66	NONE	
EP 297927 A	04-01-89	DE 3889256 D DE 3889256 T JP 1105204 A JP 2543748 B US 5071906 A	01-06-94 11-08-94 21-04-89 16-10-96 10-12-91
US 5502304 A	26-03-96	NONE	
US 5423432 A	13-06-95	US 5336714 A	09-08-94